

SANDWICHELEMENT

Stadurlon Concept

Product Information

Stadurlon Concept




Description:

Stadurlon Concept sandwich panels consist of an extruded polystyrene core and, on both faces, top layers of Stadurlon of 1.5 mm thickness. The sandwich panel is covered with a protective foil on both sides. 10 years Stadur guarantee.

Properties:

- high scratch resistance
- anti-graffiti effect
- self-cleaning surface / lotus-effect
- optimised u-values
- if desired with increased burglary protection
- if desired with improved sound insulation
- surface smooth or grained
- trimmed on 4 sides

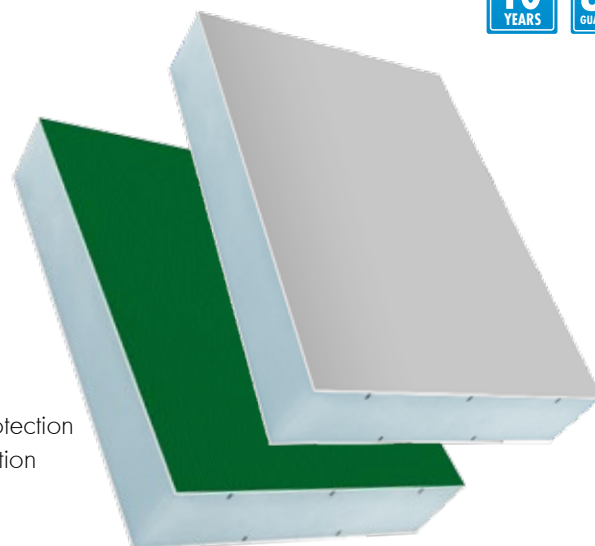

Facings:

Stadurlon is an efficient plastic material which is applicable for the use from -20°C up to +120°C. The special surface is highly UV-resistant. Stadurlon compact plate both sides 1.5 mm smooth or grained with special surface incl. protective foil. Standard colours: RAL 3020 traffic red (smooth), RAL 5002 ultramarine blue (smooth), RAL 6005 moss green (smooth), RAL 6009 fir green 6125 (grained), RAL 7001 silver grey 7155 (grained), RAL 7016 anthracite grey (smooth/grained), RAL 8017 chocolate brown (smooth), RAL 9005 jet black (smooth), RAL 9006 white aluminium (smooth).

Many other RAL and metallic colours are possible. Please refer to the current price list for valid formats and thicknesses of each surface/colour.



Core Material:

Extruded polystyrene foam, CFC-free or CO₂ foamed, low vapour permeability, lowest water absorbance, B1 in accordance with DIN 4102. The foam core is corrugated for optimum adhesion. No dust release during processing. Core material of different thermal conductivity λ_D -value 0.029 - 0.035 is available.

Overall Thickness:

24 mm - Further thicknesses (thicker / thinner) of the facing layers or the foam core available on request.

Formats:

2150 x 1000 mm (grained) / 3000 x 1500 mm (grained) / 3000 x 2000 mm (smooth / grained)

Other formats and fixed formats are available on request.

Technical Data:

Overall Thickness	Facings	U-Value (λ_D 0.029)	U-Value (λ_D 0.035)
24	1.5 mm	1.11	1.29

Special Elements:

Stadurlon Concept sandwich elements can be supplied with optimised sound insulation values by incorporating special sound insulation panels or with intrusion-inhibiting aluminium inserts. Edge jointing inserts of wood, plastic or aluminium and edge finishing of the foam core as a stepped rebate or tongue and groove are possible. Other core materials, e.g. polyurethane foam, mineral wool or honeycomb construction materials are available on request.

Areas of Application:

Window panels, parapet elements, partition walls, exhibition construction, door panels, container construction, balcony cladding boat and yacht building, facade elements, refrigeration rooms, advertising signs

Note:

In the case of subsequently painted elements for which Stadur has given no written release any claim under the guarantee is void. Due to considerably better sound insulation values and a clearly quieter element we recommend the use of 2.0 mm facing layers. When solvent-based substances are employed polyurethane foam must be used as the core. For further information please refer to our brochure: Processing Instructions.

The product colours and surfaces shown in this brochure are subject to printing variations. Should you require exact colour and surface characteristics we recommend that you ask for a sample. Technical changes reserved. All business transactions are subject to our general terms and conditions which can be viewed at www.stadur.com.