

# SHOWER ELEMENT HighTec Board




# Product Information

HighTec Board - Complete shower tray with ceramic covering

The superior-quality, skin-friendly ceramic surfaces have the excellent scratch resistance MOHS hardness 8. This is only exceeded by the hardness of a diamond. In addition the surface is resistant to aggressive liquids of all kinds. With four standard colours and 12 further colours, the exclusive surfaces offer individual creative space. A uniform image is achieved thanks to the factory-revised cover in the same ceramic design. You can set accents in your bathroom by the combination of large-size wall elements and floor coverings in the same look.

#### Your advantages:

- Barrier-free thanks to floor-level installation
- Suitable for wheelchair use
- Firm standing due to a gradient of only approx. 2-31 %
- 8 standard sizes in square and rectangular shapes
- Large variety of colours
- Joint colour matched to the surface
- Cover in uniform ceramic design
- Also available as Line Board (with channel drain)
- Extremely scratch-resistant
- Resistant to many aggressive liquids
- Surface material usable in the wall area
- Screed edge for transition to customer's ceramics

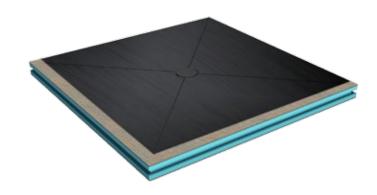

- Optional footstep sound absorption
- Alternatively sealed, absolutely watertight
- Groove formation for optimum binding to wet screed or for further processing with the BaseTec NF flooring board
- Special sizes and designs available upon request
- Sound insulation in the wall connection area due to factory-fitted standardised insulating tapes
- Factory-fitted sealing tape facilitates sealing in the wall area
- Integrated heat insulation
- Easy, time-saving and clean assembly
- 5-year warranty on leak-tightness





## Accessories: HighTec Board Rapid

substrate block for height adjustment under the HighTec Board, made of extruded polystyrene hard foam, double-sided special coating, with factory-made drain recess. Available to fit all sizes. Material thicknesses: 20, 30, 40, 50, 60, 80 mm

### NF flooring board

for connection to the HighTec Board; enables the watertight, dry finishing of floors. Easy, fast and safe processing is ensured by being equipped with groove and tongue. Size (L x W x H): 1250 x 600 x 40 mm, with 50 mm footstep sound absorption

Stadur Produktions GmbH & Co. KG Ostereichen 2-4, 21714 Hammah, Germany, E-Mail stadur@stadur.com Revision 2015-11-A Phone +49 (0) 41 44 / 234-0 Fax +49 (0) 41 44 / 234-100 www.stadur.com

